

HSW EASY Safe

For permanent safety


Safe application, elegant design. The improved horizontal sliding wall.

Outstanding strengths of the HSW EASY Safe system:


- The use of laminated safety glass (LSG) increases the level of safety and also expands the creative possibilities
- A visible status display uses a clear color system to indicate the status of the top

locking device in the pivoting sliding panel. This gives a better overview and even more security.


- Double brush seals in the top and bottom door rails reduce drafts to a minimum

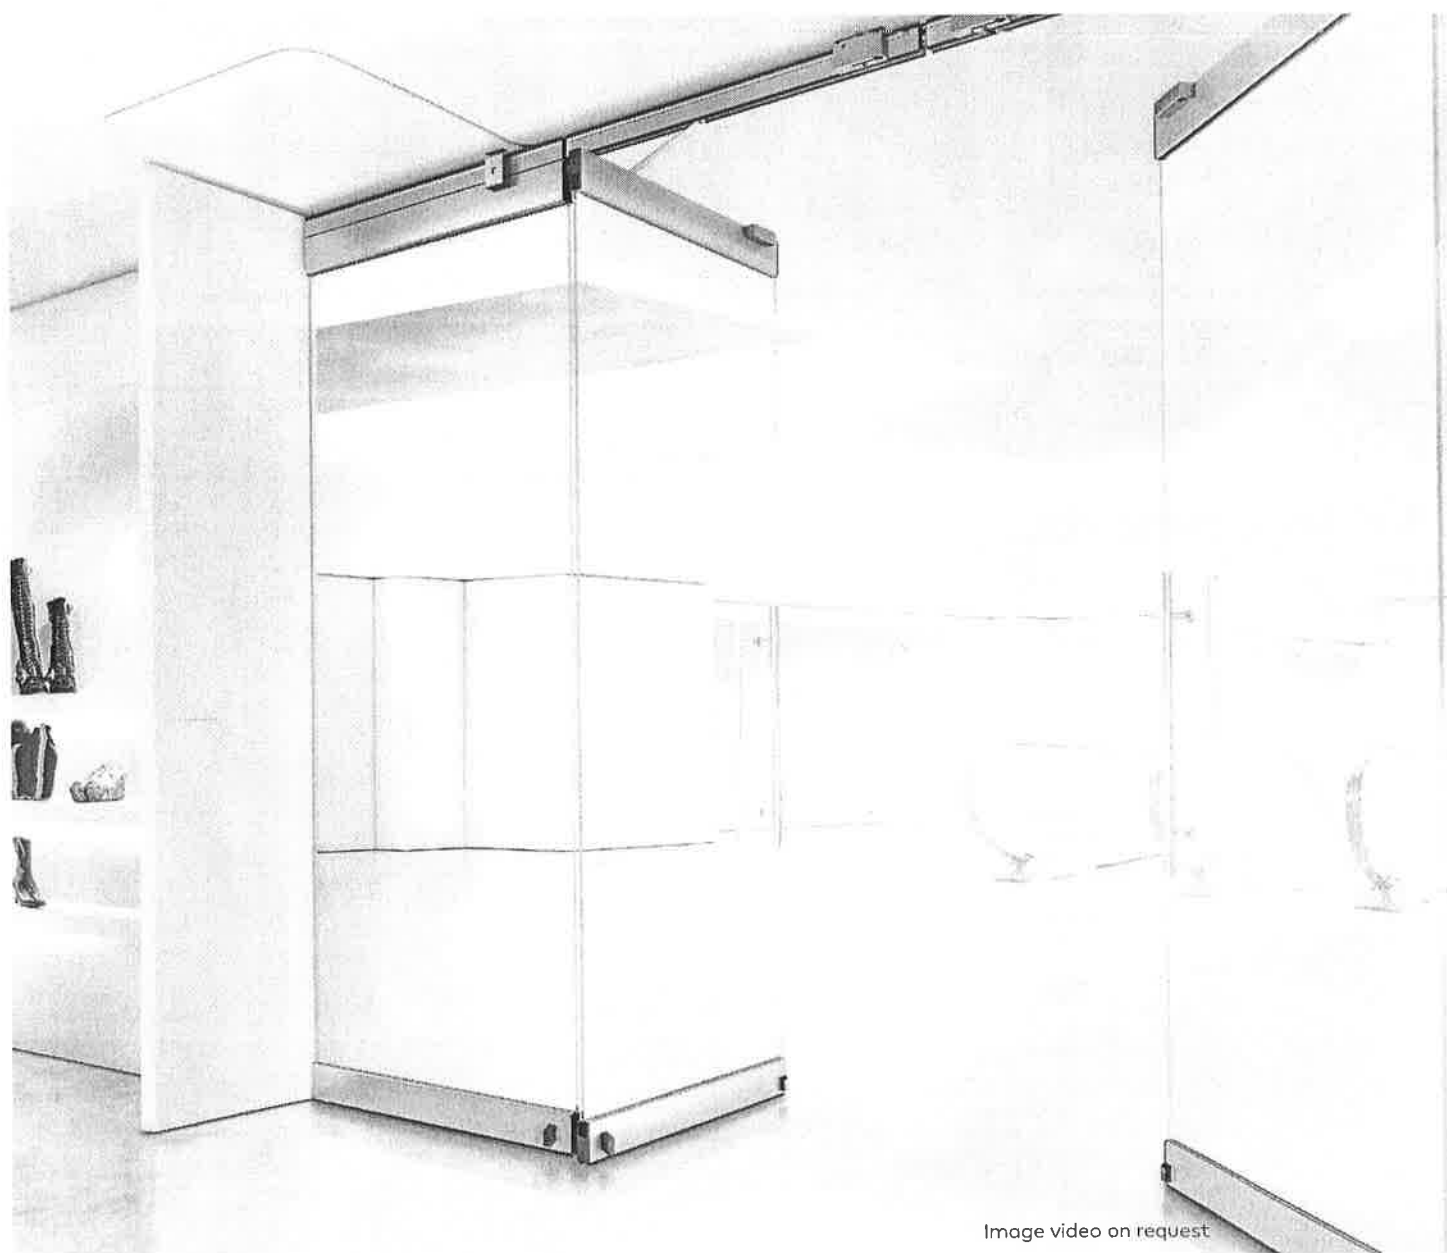


Contents

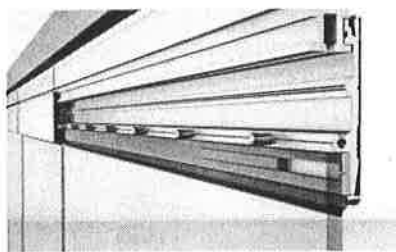


04 **Increased safety and design freedom**
Thanks to laminated safety glass and Clamp&Glue technology

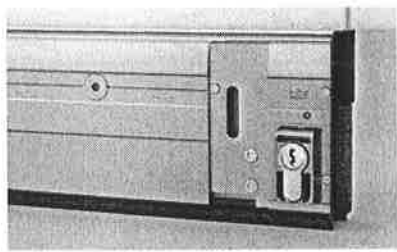

05 **Easy installation**
With 3-in-1 multilock component

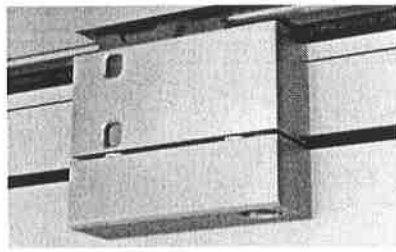


06 **Improved overview**
With lock status display

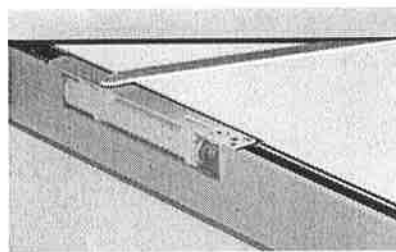

06 **Perfect symbiosis of technology and design**
With concealed door closers


Standards	
Wind load	• Air permeability class 2 in accordance with EN 12150 • Frame deflection class B2 in accordance with EN 12150 • Repeated pressure/suction in accordance with EN 12150 • Safety test class 1 (+/- 600 N) in accordance with EN 12150 • Test procedure in accordance with EN 12150 • Classification based on DIN EN 12150
Endurance strength	• Class 3 in accordance with EN 12150 for sliding doors > 100 kg • Class 3 in accordance with EN 12150

07 **Technical details**
Standards

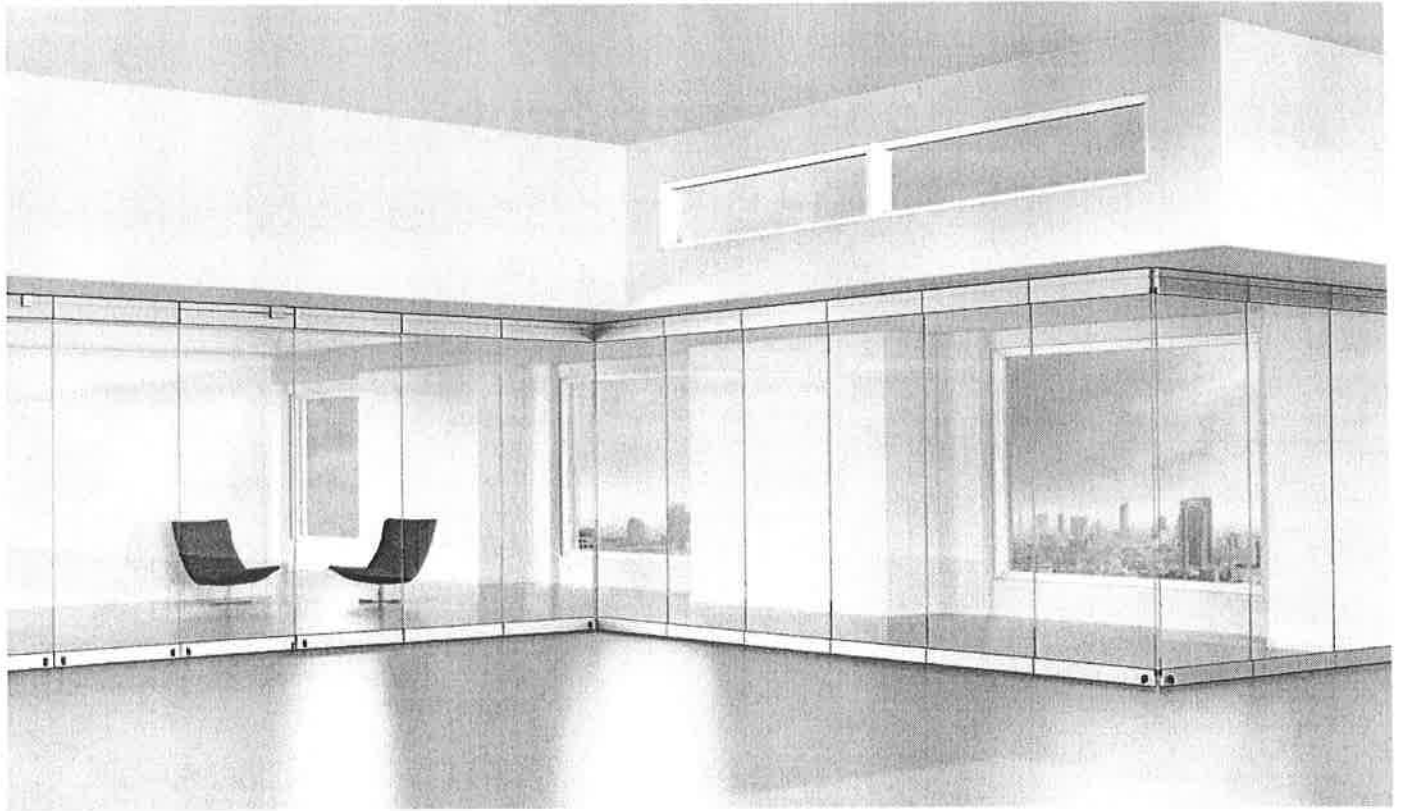

Proven hold for maximum safety

Laminated safety glass for ensuring greater safety

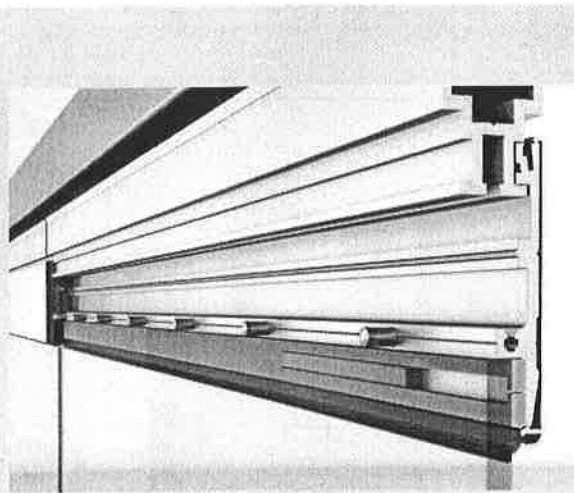

Hassle-free installation thanks to proven Clamp&Glue technology

The fixing process for the HSW EASY Safe is very simple. The special adhesive is fed through the injection hole into the adhesive channel and distributes itself evenly. The panel can be installed after a drying time of only 15 minutes.

Creative freedom with permanent safety


Thanks to the proven Clamp&Glue technology, the HSW EASY Safe enables the use of laminated safety glass. The use of films within the laminated safety glass makes it possible to use the horizontal sliding wall as an individual design element, thereby setting new standards in design and functionality.

Impressive added value:

- Laminated safety glass not only makes the use of HSW EASY Safe an attractive option, but also one that is particularly secure
- The proven Clamp&Glue technology enables easy bonding whilst providing a secure hold for the fitting and the glass
- Special films in the laminated safety glass provide creative freedom in a variety of ways along with additional functions such as sun, noise or privacy protection

Simplicity on hand – and foot

The multilock with three locking options

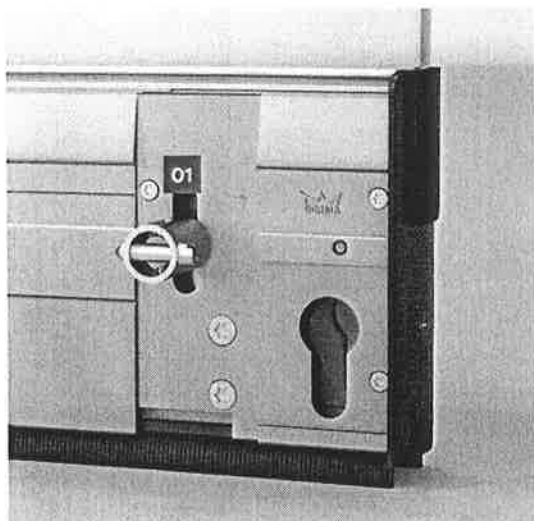

The new multilock system opens up a new world of simplicity

The multilock unites three locking options in one compact component.




01
Face mounted slide bolt

02
Cylinder lock

03
End mounted slide bolt


Usefulness and simplicity provide clear benefits:

- The bottom door rail provides three options for secure locking: face mounted slide bolt, end mounted slide bolt or cylinder lock
- Maximum convenience in application provided by the foot-operated locking options of both the face mounted and the end mounted floor bolts – from easy to hassle-free

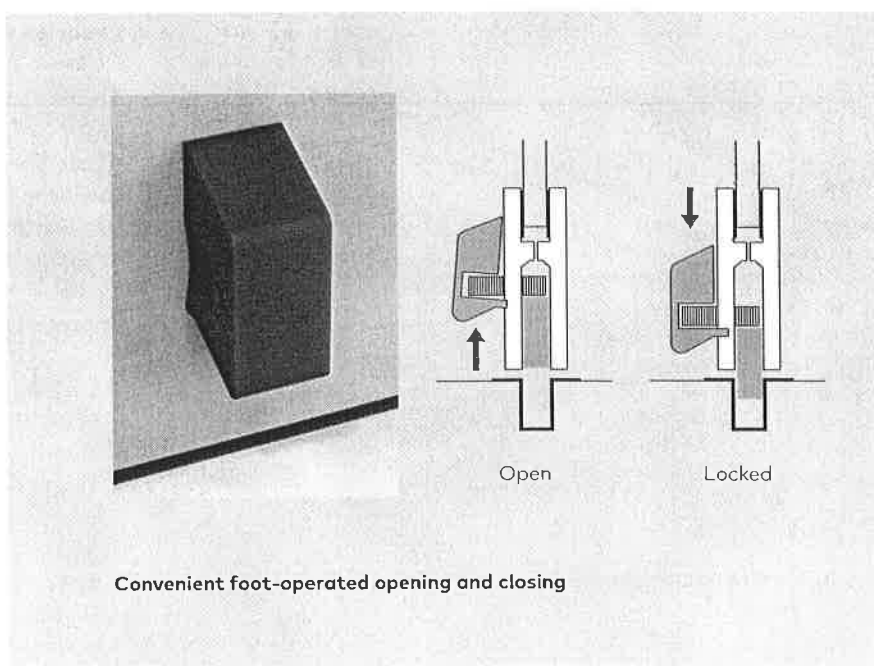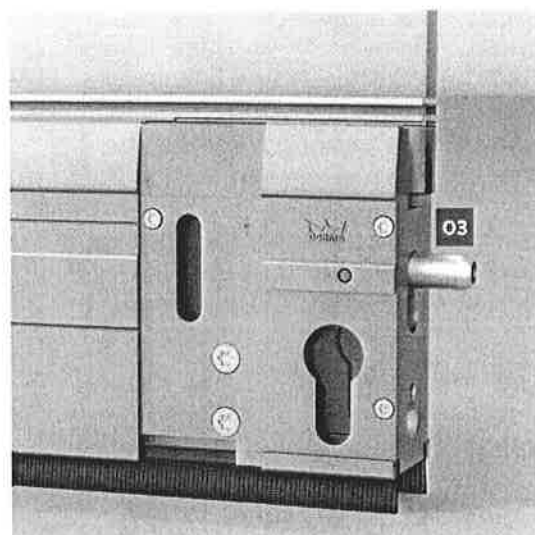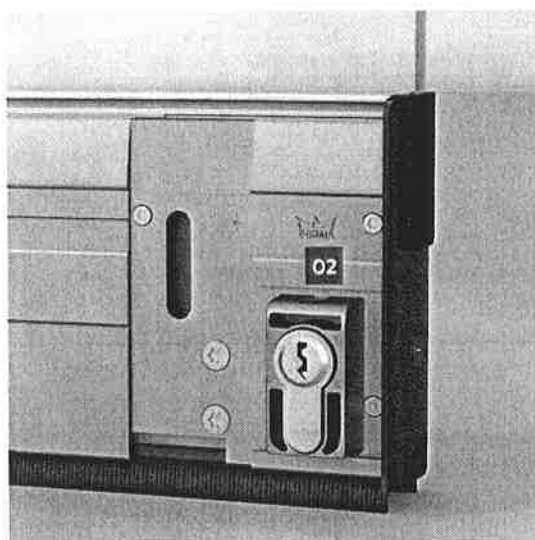

A smart way to greater convenience and security

Greater clarity and easier locking

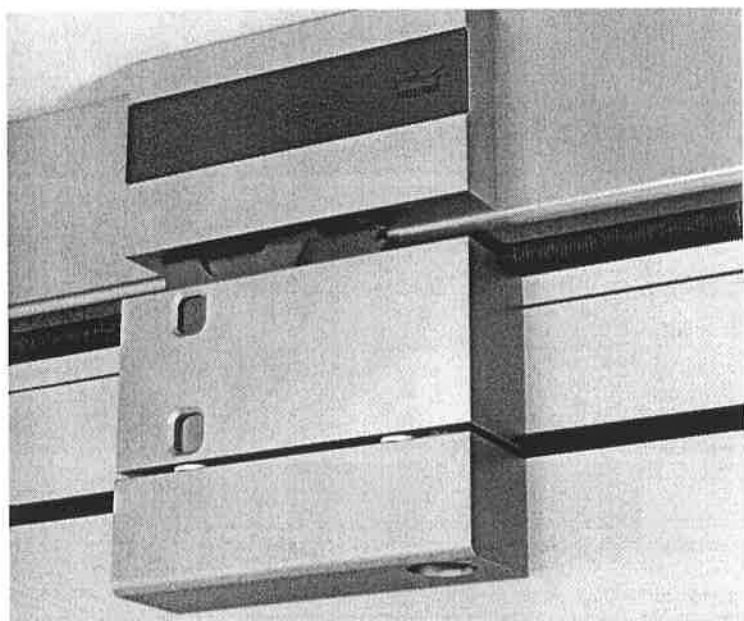

The locking status at a glance

Security and convenience in one: the top door locking device clearly shows the locking status of the door panel on the status display. This quickly provides the user with a feeling of reassurance and security.

Status display



Sliding function

Locked

Locked


Open

Door function

Open


Locked

Locked

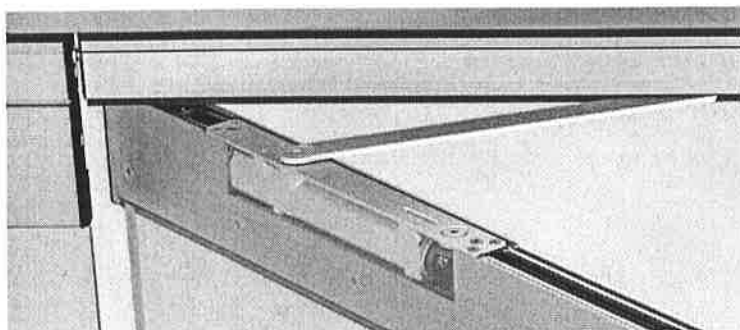

The concealed door closer – invisible and hassle-free

The perfect symbiosis of technology and design: In the pivoting/sliding panel of the HSW EASY Safe, the door closer ITS 96 2-4 is fully integrated into the top door rail and therefore remains out of sight.

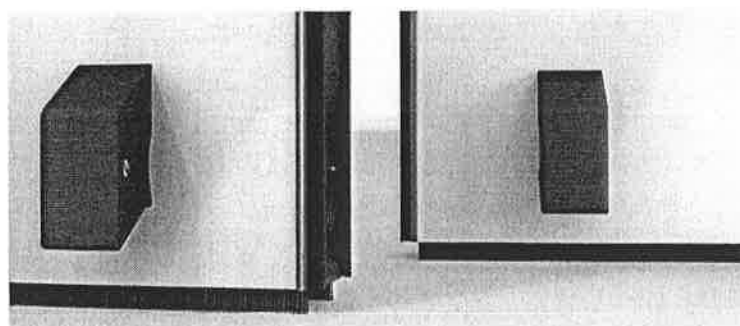

Fewer drafts ensure even greater comfort

Innovative double brush seals in the top and bottom door rails provide proper containment isolation and noticeably reduce drafts to a minimum. The vertical brush seals that may optionally be used (available for retrofitting) can be mounted along the entire height of the panel and create additional sealing – for noticeably greater comfort.